
bartcoLIGHTING.com | t.714.230.3200 | f.714.230.3222


Type:



- ••• Fully assembled wiring channel is formed and welded 20 ga. steel chemically treated to resist corrosion and enhance paint adhesion with extruded aluminum LED housing in powdercoat white finish
- ••• Frosted acrylic lens available with 15° and 120° beam angles
- ••• LEDs are available in 2,700K, 3,000K, 3500K, 4,000K and 5,000K (±200K) color temperatures
- ••• Driver has 24V ±5% output voltage. 120-277 VAC. input, 0-10V (100-10%) dimming
- ••• Smooth 90° rotatable and hold at any fixed angle
- ••• Lamp life is rated at 50,000 hours
- ••• Limited 3 year warranty
- ••• UL listed for dry and damp locations
- ••• IBEW manufactured and labeled
- ••• Made in the U.S.A.

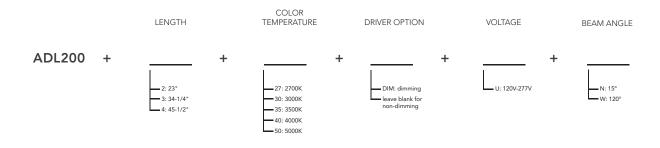

Profile



pg.01