


HL2-Y | chill

2" aperture direct/indirect acoustic panel luminaire, Y-shape configuration

Project: _____ Type: _____

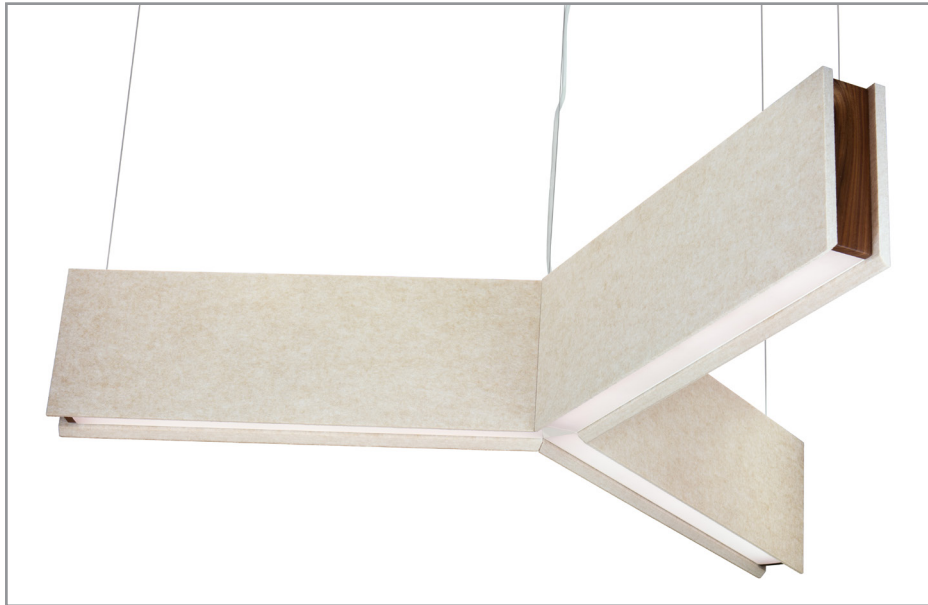

FEATURES

The Chill HL2-Y direct/indirect luminaire is designed to enhance interior spaces with subtle to bold colors, while damping sound reflections. The 2" wide aperture fixture, configured in a Y-shape, is clad with ½" thick felt acoustic panels in 8", 12" or 16" heights, 4', 6' and 8' nominal sizes and twenty standard colors. Fixture end treatments include matching acoustic material, machined aluminum end caps with powder coat or printed imagery options or solid wood end caps in a variety of finishes. The HL2-Y is Controls Capable, being offered with a variety of integrated control options. Add further sound absorption in an architectural space with complimenting HB2-Y non-illuminated acoustic baffles.

SPECIFICATIONS

Fixture constructed of extruded aluminum, heavy gauge sheet formed steel and aluminum, extruded acrylic lenses and PET acoustic felt panels.

Fixture offered in sizes of 4', 6' and 8' nominal diameters.

The ½" thick, 100% PET (>75% recycled), fire rated (ASTM E84 Class B) 0.98 NRC acoustic felt panels feature a bottom beveled edge and are available in twenty standard colors.

Fixture end treatment options available in matching acoustic material or machined aluminum end caps with standard powder coat, optional RAL finishes, high resolution digital imagery or solid wood end caps.

Standard integral 120-277V driver offered with 0-10V dimming or non-dim (other dimming driver options available).

Integral 120-277V emergency battery backup available for non-dim or 0-10V fixtures, wired to operate the direct source (consult factory for details and for compatibility with other drivers).

Standard regular outputs are 2896 lumens for the direct source and is 4100 lumens for the indirect source.

LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 90+ CRI typical.


Bartco Lighting Controls Capable fixture available with integrated controls from a variety of suppliers.

Life: 50,000 hours L₇₀.


Limited five year warranty.

UL and C-UL listed for dry locations.

SECTION

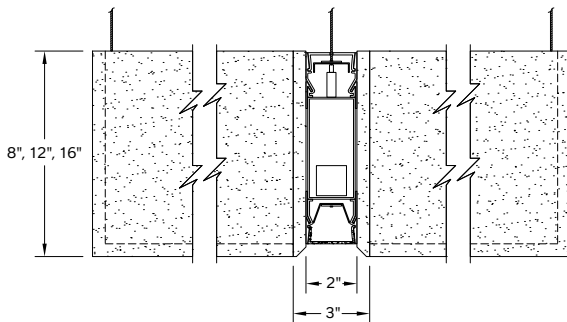

PLAN




PERFORMANCE

DIAMETER	OPTIC CONFIGURATION	OUTPUT	LUMINAIRE WATTS	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	Indirect – Lambertian	R: regular	33.1	4100	124
	Direct	R: regular	33.1	2896	87


*Note: All data reflects fixtures with 3500K LEDs



HL2-Y -

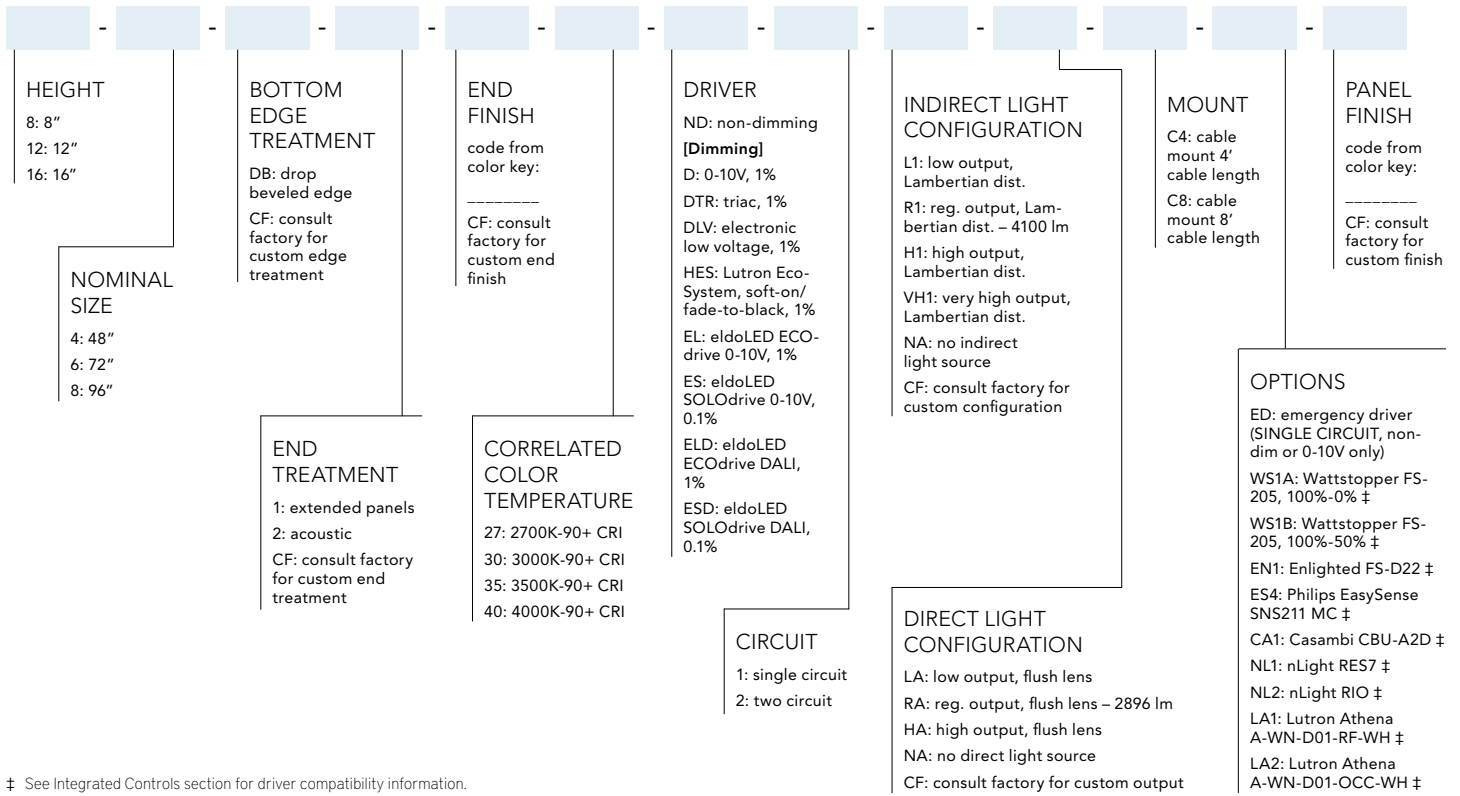


HEIGHT


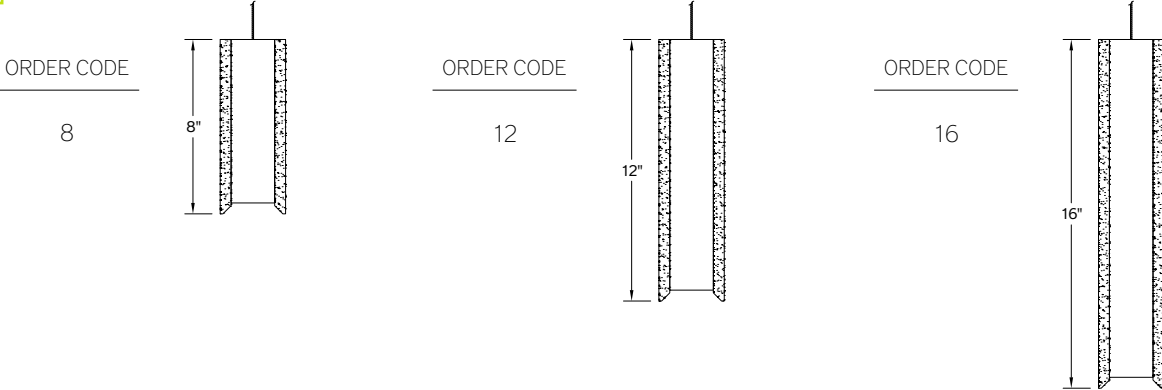


BOTTOM EDGE TREATMENT

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
DB	DROP BEVEL EDGE	Bottom edge of panels extends 1/2" below the lens, finished with a 45 degree bevel.



END TREATMENT

	ORDERING CODE	DESCRIPTION	SPECIFICATIONS
	1	EXTENDED PANELS	Panel ends extend 1/2" beyond the housing length. Includes machined aluminum end cap.
	2	ACOUSTIC	Acoustic material end cap, bottom edge finished with 45 degree bevel.

END FINISH COLOR KEY









NOTE: For End Treatment 2 (acoustic), the end finish will be the same as the specified panel finish.

POWDER COAT FINISH OPTIONS

Applies to End Treatment 1 (extended panels).

Finish applied to machined aluminum end cap.

When the indirect or direct light source options are omitted, the visible fixture will be finished to match.

<p>AW</p>  <p>Architectural White</p>	<p>WH</p>  <p>White (semi-gloss)</p>	<p>BL</p>  <p>Black (semi-matte)</p>	<p>MB</p>  <p>Matte Black</p>	<p>ESS</p>  <p>Environmental Satin Silver</p>
<p>BZ</p>  <p>Bronze</p>	<p>RAL</p>  <p>Select from options on the Panel Color Key</p>	<p>CF</p>  <p>Custom Finish Consult Factory</p>		

END FINISH COLOR KEY (CONTINUED)

WOOD END CAP OPTIONS

Applies to End Treatment 1 (extended panels).


Furniture grade caps are 1/2" thick and hand finished in clear shellac with a liquid wax sealer.

WN




Solid Walnut

EB




Solid European
Beech

MH




Solid Mahogany

WO




Solid White Oak

BB




Bamboo Ply

P01



Baltic Birch Ply
Natural Maple

P02




Baltic Birch Ply
Red Stained Maple

P03




Baltic Birch Ply
Orange Stained Maple

P04



Baltic Birch Ply
Green Stained Maple

P05




Baltic Birch Ply
Blue Stained Maple

FAUX FINISH OPTIONS

Applies to End Treatment 1 (extended panels).

Finish comprised of a multi-stage application process that produces durable, high resolution imagery.

FXW




Faux Walnut

FXP




Faux Pine

FXWO




Faux White Oak

FXC



Faux Cherry


FCF



Custom Faux Finish
Consult Factory


INDIRECT LIGHT CONFIGURATION

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
L1	Low light output - Lambertian distribution	Lightly diffuse extruded acrylic lens for general Lambertian distribution
R1	Regular light output - Lambertian distribution	
H1	High light output - Lambertian distribution	
VH1	Very high light output - Lambertian distribution	




DIRECT LIGHT CONFIGURATION

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
LA	Low light output - flush lens	Flush, frosted extruded acrylic lens
RA	Regular light output - flush lens	
HA	High light output - flush lens	



MOUNTING

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
C4 and C8	CABLE MOUNT	<p>Mounting option includes:</p> <ul style="list-style-type: none"> • Ø 1/16" x 48" (C4) or 96" (C8) aircraft cables • 60" (C4) or 108" (C8) power cable in coordinating finish • Ceiling couplers, cable grippers and Ø 5" white canopies <p>NOTE: WHEN DUAL CIRCUIT OPTION IS USED, TWO POWER CABLES ARE REQUIRED</p>

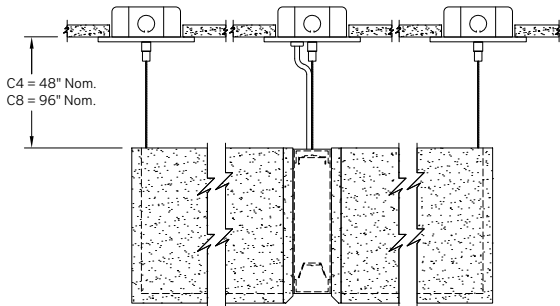


OPTIONS

ORDERING CODE	DESCRIPTION	SPECIFICATIONS
ED	EMERGENCY LED DRIVER	<ul style="list-style-type: none"> • Universal 120-277V input voltage emergency driver delivers initial minimum power of 10W for 90 minutes. • Available with non-dim or 0-10V driver/s, operating the direct source (consult factory for details and compatibility with other drivers). • Indicator lamp/test switch located on the underside at an end.

OPTIONS - INTEGRATED CONTROLS

Note: Control option takes up 4" of the overall lens length. Controls are mounted to flush filler piece, in Architectural White finish, located at an end.



	ORDERING CODE	LIGHT OUTPUT SETTING	MODEL	CONTROL PROTOCOL	FUNCTIONS	COMPATIBLE DRIVERS
 <p>WATTSTOPPER®</p>	WS1A	100% – 0% ¹	FS-205	N/A	PIR occupancy and light level sensor.	For use with on/off or 0-10V dimming drivers only.
	WS1B	100% – 50% ¹				
	EN1	Set during commissioning	FS-D22	Bluetooth Wireless	PIR occupancy, ambient light sensing, daylight harvesting, and environment monitoring for use within an Enlighted control network.	Provided with Advance sensor ready series 0-10V dimming drivers.
 <p>EasySense</p>	ES4	Set during commissioning	SNS211 MC	Bluetooth Wireless	Occupancy, daylight harvesting and task tuning sensor with advance grouping, for use within a MasterConnect network.	Provided with Advance sensor ready series 0-10V dimming drivers.
	CA1	Set during commissioning	CBU-A2D	Bluetooth Wireless	0-10V/DALI driver controller, for use within a Casambi ecosystem.	For use with 0-10V or DALI drivers. Consult factory for details.
	NL1	Set during commissioning	RES7 ²	Radio Wireless	Dimming, PIR occupancy detection and daylight harvesting, for use within an nLight AIR network.	Provided with Advance sensor ready series or eldoLED 0-10V drivers.
	NL2		RIO ²		Dimming, for use within an nLight AIR network.	
	LA1	Set during commissioning	A-WN-D01-RF-WH	Radio Wireless	Dimming only for use with an Athena control system.	Provided with Advance sensor ready series or eldoLED 0-10V or eldoLED DALI-2 drivers.
	LA2		A-WN-D01-OCC-WH		Dimming, PIR occupancy and daylight sensor for use with an Athena control system.	

1. Consult factory for custom light output setting.





















2. Consult your Acuity representative for application-specific model number.

ACOUSTIC PANEL COLOR KEY

Chill acoustic panels are made from 100% PET (>75% recycled) colored felt fibers. The 1/2" thick, cohesive material construction traps sound waves and aids in reducing sound reflections within interior spaces (0.98 NRC). Lightweight and durable, the panels are also fire rated (ASTM E84 Class B). The twenty standard colors can be paired with matching acoustic ends, wood end caps or metal end caps in six standard powder coat finishes, optional coordinating RAL colors or Faux finishes.

Note: Ordering Code shown above color image.

Optional coordinating RAL finish for end cap and unlit areas shown in parenthesis.

01  White (RAL 9003)	02  Granite (RAL 7047)	03  Overcast (RAL 7004)	04  Slate (RAL 7039)	05  Lava Rock (RAL 7016)
06  Black Sand (RAL 7022)	07  Black (RAL 9004)	08  Light Sand (RAL 1013)	09  Dark Sand (RAL 1019)	10  Mango (RAL 1017)
11  Poppy (RAL 2011)	12  Hibiscus (RAL 3031)	13  Burgundy (RAL 4002)	14  Violet (RAL 4005)	15  Marine Blue (RAL 5011)
16  Deep Sea (RAL 5002)	17  Sky Blue (RAL 5007)	18  Laguna Blue (RAL 5012)	19  Emerald (RAL 6012)	20  Lime (RAL 6011)